

SGRT



Sight Glass Removal Tool

Fits exactly in the slot to take out 1" sight glasses.



1/4" x 1/4" Humidifier Solenoid - UHS99

24V Solenoid direct replacement for the Aprilaire 4040 and any other 1/4" x 1/4" compression humidifier solenoid. Fittings are thread sealed and installed



Black Expanding Hose - BX50

This new and improved expanding hose is perfect for any contractor's truck. Lightweight and durable. Brass fittings include a ball valve. 50' - and it shrinks to 25' when water pressure is removed - no bringing water back to the truck



FlexConnect - FlexCon34-6/FlexConBULK

A no-glue/adhesive coupling for 3/4" PVC condensate lines. Provides access for drain clearing on new installs where required. Great for repairing cut lines in a hurry

EL10



Easy Leveler Furnace Legs

These handy furnace legs will level the furnace by turning internal carriage bolts so that high efficiency furnaces and AC units can safely drain damaging condensate.

POP3, 5,10,15, 20

LI'L Popper

These 3-20 amp manual reset circuit breakers plug into the residential or commercial equipment control boards, where the ATC fuse would be. Manual reset button to used instead of burning up fuses while diagnosing control circuit problems.



ENERGY SAVING PRODUCTS

Tools & Controls for the Professional Technician

Contact: Alex Newkold
Phone: (937) 898-0391
Email: alex@espcompany.com



QuickBlast - QB1

Condensate isolation and blow out valve. Simply turn the valve 90 degrees to isolate, provide pressurized nitrogen or CO2 upstream, then downstream, and open the valve back up. Line is clear and clogs are history

FF75



Ole Switcheroo Furnace Magnet

Holds down pop out switches so the technician can work on equipment, with the panel removed.

ZT10



Z-Tool

Z-Tool has a 1/4" x 5/16" swivel socket head design to remove sheet metal screws in tight places. Perfect for flame sensing rod removal.

UHS24 and UHS120



Universal Humidifier Solenoid

These 24 or 120V solenoid kits contain all necessary fittings to replace 99% of failed humidifier solenoids today. Just change out the fittings in the body to replicate Aprilaire, General, Skuttle, Honeywell, Carrier, Trane, and many more.


NS2



Universal Air Switch

The NS2 small footprint air switch mimics the same size air switch as the IS2 Honeywell exact set point. The difference being that NS2 replaces them all with an internal spring changeout and can be set anywhere from .1 to 10 inches water column. Utilize a Fieldpiece SDMN6.

RSS495/498



Universal Air Switches

These two do the same as the NS2 with a larger standard footprint but not with as wide a set point range. The 495 runs from .25 to 1", and the 498, from 1-4".

GB10



Finny's Gasket Book


This garlock gasket book contains 36 commonly used gaskets for compressor rotolock and pad valves. Also contains a variety of cage assembly gaskets, and a blank sheet for custom cutting.



AW12 and 58

Anti Windmill Brake

Anti Windmill brakes slide down over condenser fan motor shafts to stop reverse motor rotation due to windage, that can contribute to motor failure.

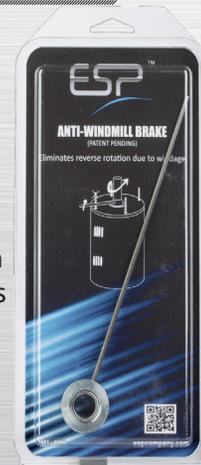

Board Removal Tool - BRT10

This dual sided tool compresses the two most common sizes of standoffs in the industry. Precision designed and drilled for perfect compression every time


CGR10



The Core Gripper

The Core Gripper grabs and removes schraeder valves with a quick twist.

PE44

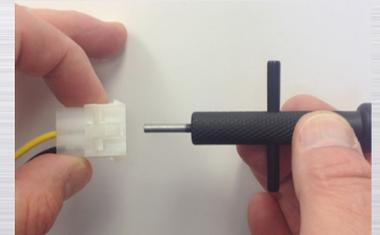

Pin Extractor Tool

This unit pops pins out of useless molex plugs so that they can be pushed back into the correct plug during control replacement.

TP35



ThermoPlug

On at 35 F, off at 45 F 120V thermostat for heat tapes and other 120V heaters



Square air switch tubing - SQAST-5

5' of 3/16", no-kink square neoprene air switch tubing.

-40 to +300 F temp rating. Also available in silicone - up to +400 F

ALDP



AC Leaf and Debris Protector


This 4' x 4' x 4' net with 1/4" mesh has an elastic edge that grips underneath the condensing unit after the net is pulled over the unit. Keeps out unwanted debris that naturally falls thru the upper grille, and clogs air flow when the season starts again. Other covers are solid, and if forgotten during spring start up can blow compressors.

ST1236-31



Sure Temp Thermometer

This patented thermometer has a sensor that is surrounded by a glycol well, that effectively slows the reaction time of the thermometer. So short term ambient changes in a cooler or freezer are not reflected on the thermometer. Supplied with zip ring mounting.

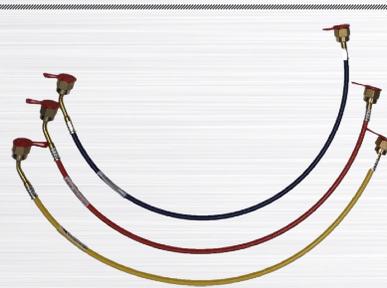

Propane Charging Hoses - SHOSE-XX

These charging hoses are rated for propane, and because of their small diameter, there is minimal charge loss in the hose. Great for any crytically charged HFC or HCFC system as well

VP24



Little Black Box

This handy control module provides 24V from two Fieldpiece test leads. Perfect for testing controls at the wholesalers counter, and can be used in the field by techs to test all controls in a system that does not have power.



Air Switch Tubing Repair Kit

Replace corroded tubing without replacing the entire tube. Contains 2 each of the following: 3" square silicone, 3" square neoprene, double barb fitting



High Pressure Control Hose - HPCH-XX

UL Rated to 1000 psi working, 5000 psi burst. These pressure control hose come in various lengths - 12", 18", 24", and 36". POE, Alkylbenzene, and Mineral Oil approved. Avoid common issues caused by vibration on pressure connections

NT02



N-Take II

This patented flapper valve opens for alternative combustion intake, when snow or ice clogs the outdoor opening. Simple to install anywhere inside the house, in crawl space, attic, or above the furnace depending upon local codes. Stops No Heat calls!!!!